

XC 48

Eear set condenser microphone, low visability, ligth weight and very low feedback.

The XC48 is ideally suited for vocal and speech applications which require much freedom of movement. External windscreen reduces noise, skin color reduces visability. Suitable for XRUHF55 wireless system or P48A Preamp.

Type condenser

Polar Pattern omnidirectional

Sensitivity -45 dBV/PA

Frequency Range 20 - 20.000 Hz


Connector XLR 3-Pin Male

Size 3,5 mm

Net Weight 1 g

power required phantom power 9-52V

accessories wind screen

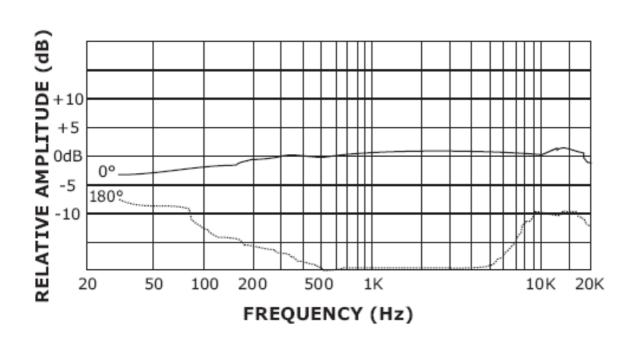

New materials and design are introduced into existing products without previous notice. Present systems may differ in some respects from those presented in this brochure.